


GPC Cyclone Dust Removal Case Study

Limestone Removal

Aerodyne Environmental tested pulverized extra fine agricultural limestone in our GPC-08 test lab. The test was done at room temperature and with a pressure drop of 6" W.C. through the cyclone. The dust loading was 35 grains/ft³. The limestone sample tested had a particle size distribution as shown in the graph below. Its mean particle size was 30 micron and had a bulk density of 90 lbs/ft³.

The GPC-08 cyclone got 90%* removal of the material.

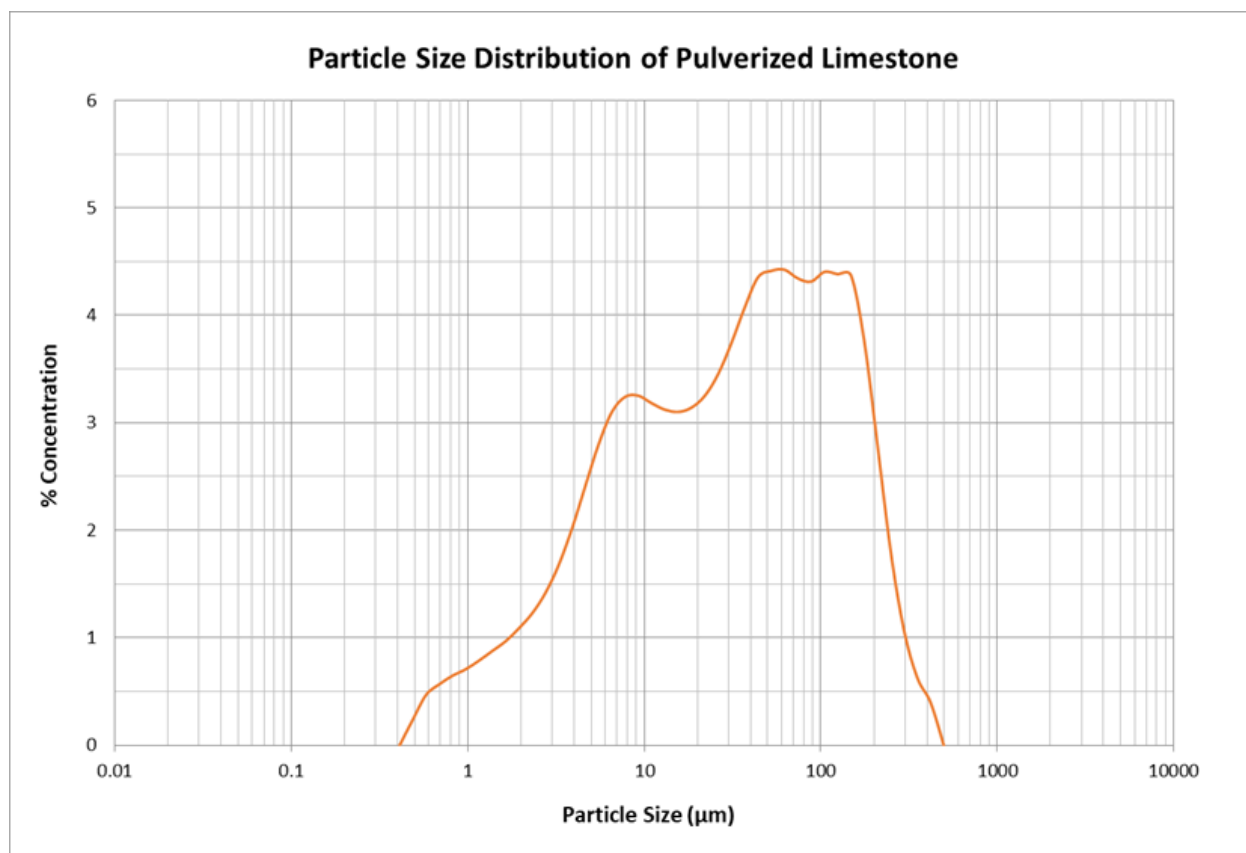

* Please note that particle removal efficiency is based on multiple factors in the process, including but not limited to cyclone size, pressure drop through the cyclone, particle size distribution, particle geometry, and material density. This test is a representative test, and results for your application may be different based on the above conditions.